

Model	Fuel Opt	High	Low	Max. Efficiency
Jordan	NG	32,000	16,000	81.0%
	LP	32,000	14,000	82.0%
Minneapolis	NG	26,000	12,500	81.0%
	LP	26,000	14,500	82.0%
Rockford	NG	26,000	12,500	81.0%
	LP	26,000	14,500	82.0%

Model	Fuel Opt	High	Low	Max. Efficiency
Jordan XL	NG	37,000	18,000	80.0%
	LP	37,000	20,000	81.0%
Minneapolis XL	NG	25,000	13,000	80.0%
	LP	25,000	13,000	82.0%
Rockford XL	NG	32,000	16,000	80.0%
	LP	32,000	16,000	82.0%

The Jordan Series Includes: Jordan, Minneapolis & Rockford
The Jordan XL Series Includes: Jordan XL, Minneapolis XL & Rockford XL

Features:

- Canada P-4 approved
- AFUE rated
- Electronic Ignition pilot system - standing pilot option as well
- LOG SET (Jordan & Jordan XL)
- GLASS MEDIA (Minneapolis & Minneapolis XL) - black
- ROCK SET (Rockford & Rockford XL)
- Co-linear air duct - accepts 3" combustion air / 3" exhaust
- High quality lifetime warranty glass (29 5/8" X 21 1/2") Quick-latch removal
- Remote control - thermostatic (flame, fan & light kit adjustment)
- Top accent lighting system - XL models only
- Fan kit - (1) 75 CFM blower
- Refractory brick lining (Jordan & Jordan XL)
- Black enamel panels (Minneapolis, Minneapolis XL, Rockford & Rockford XL)
- Engineer-designed burner system
- Minnesota energy code compliant to 50 pascals

Required for Installation

- 1 piece shroud (standard or custom size)
- Rectangular, beveled & convex design fronts

Safety

- Each unit factory tested!
- Tested by OMNI - test laboratories
- Complies with ANSI-Z21.88a -2009•CSA 2.33-2009 P.4.1-09 "Vented Gas Fireplace Heaters"
- U.S. & Canadian Installation approved
- Sealed combustion chamber
- Removable control board with safety pilot
- Automatic pressure relief glass system
- Bedroom & mobile home approved

Clearances

Jordan Series

- From insert to combustible floor in front..... Refer to manual
- From insert to side wall..... 3"
- Mantel 9" deep from top of insert* 12"
**Mantel must be a minimum of 12" from top of fireplace face. The maximum depth of this height is 9". See additional mantel clearance configurations in the installation manual.*

Jordan Series XL

- From insert to combustible floor in front..... Refer to manual
- From insert to side wall..... 3"
- Mantel 9" deep from top of insert* 16"
**Mantel must be a minimum of 16" from top of fireplace face. The maximum depth of this height is 9". See additional mantel clearance configurations in the installation manual.*

Specifications		
	Jordan Series	Jordan XL Series
Height	19 3/4"	23 5/8"
Width	30"	34"
Back Width	24 5/16"	28 3/16"
Depth	15 1/2"	16 3/8"
Weight	150 lbs	165 lbs

Existing Fireplace Requirements

	Jordan Series	Jordan XL Series
	<i>Existing fireplace opening must be at least</i>	<i>Existing fireplace opening must be at least</i>
Height	20 5/8"	24 1/2"
Front Width	30 5/16"	34"
Width at min. depth	24 5/16"	28 3/16"
Depth	16"	16 3/8"

Existing chimney must be at least

- | | |
|---|----------------|
| Inside Diameter: | Height: |
| • Factory built solid fuel chimney: 7" min. | • 10' min. |
| • Masonry chimney: 6" x 8" min. | • 35' max. |

Vent System Approval & Requirements


These models are approved for use with the following Vent Systems only:

- Kozy Heat™ - #816 venting components
- Simpson Dura-Vent™ - 46DVA-VCH
- Selkirk Metalbestos™ - 40T-VC
- Ameri-Vent™ - 4DVC
- Metal Fab™ - 4DVT
- ICC™ - TM-INT TM-SVT
- Security™ - 3PDVCV
- RLH™ - HS-C33U99 HS-C33F1313 HS-C03333-1313

Vertical Termination ONLY

Minimum vent run: 10' Maximum vent run: 35'

Jordan Series

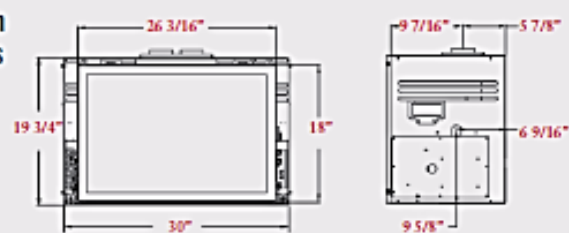

Jordan XL Series

