

Specifications

BTUHD-30 -Hi 30,000

Lo 19,900

D-40 -Hi 40,000

Lo 6,500

EfficiencyThermal up to 86.4%

Gas SupplyNatural or LP

Pilot SystemPiezo Spark

Safety ControlsANSI/AGA

Certified

Safety TestedWarnock Hersey

to CGA/AGA/ANSI Std.

Shipping Weight ...D-30 -175 lbs.

D-40 -200 lbs.

Products, specifications, and prices
subject to change without notice

Consult our Owners Manual for all final dimensions.
Mendota products are manufactured in the U.S.A.

Warnock Hersey




Standard Equipment

Log set, log rack, coal bed, D-30:
2-level burner, D-40: 3-level
burner, 2 blowers with rheostat,
neo-ceram glass and firebrick.

Options

Black, black onyx, vintage iron,
cast, copper, nickel, silver, brass,
and 24k gold fronts; wall switch,
remote control and thermostat.
Rectangular or arched surround.
Brass or black surround trim.
Custom surrounds available upon
request. Co-linear or co-axial flue
venting. Natural vent (B-Vent),
D-30 only.

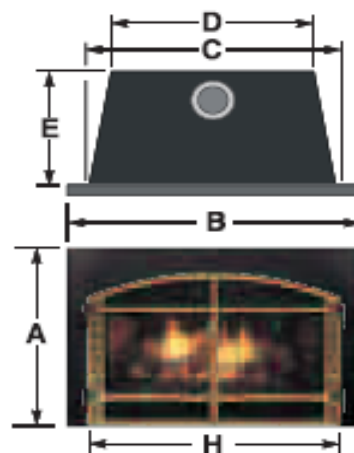

	D-30 TimberFire			D-40 Deep Timber		
A	24"	27"	31"	31"	33"	36"
B	36"	40"	44"	44"	48"	52"
C	30 7/16"			*34 7/8" **34"		
D	22 1/4"			24 1/4"		
E	16 3/8"			16 13/16"		
F	1 1/8"			1 1/8"		
G	19"			23"		
H	30 7/16"			36 1/2"		
I	15 1/2"			19 1/8"		
J	8 3/8"			9"		

*With no Surround Trim or with the Standard Surround Trim C=34 7/8".

**With the Optional Deeper Surround Trim C=33 3/4"

D-30 Andover Arched Faceplate

L-24 7/8" M-40 1/4" N-28 7/8" RADIUS-52 11/32"

D-30 Bentley Arched Faceplate

L-28 7/8" M-40 1/4" N-22 7/8" RADIUS-36 7/8"

D-40 Andover & Bentley Arched Faceplate

L-28 3/8" M-44 3/16" N-33 3/8" RADIUS-51 1/2"

