


Mendota FullView FV33i & FV44i Direct Vent Gas Fireplace Insert Specifications

Specifications	
BTUH	FV33i - Hi 31,000 Lo 10,000 FV44i - Hi 40,000 Lo 15,300
Efficiency	Up to 86.3%
Gas Supply	Natural or LP
Vent Size	3" Intake, 4" Exhaust
Safety System	AGA Certified IPI Auto Electronic Ignition System Activated with Thermostatic Remote Control
Safety Tested	Intertek to CGA/AGA/ANSI Standards
Weight	FV33i - 175 lbs. FV44i - 200 lbs.

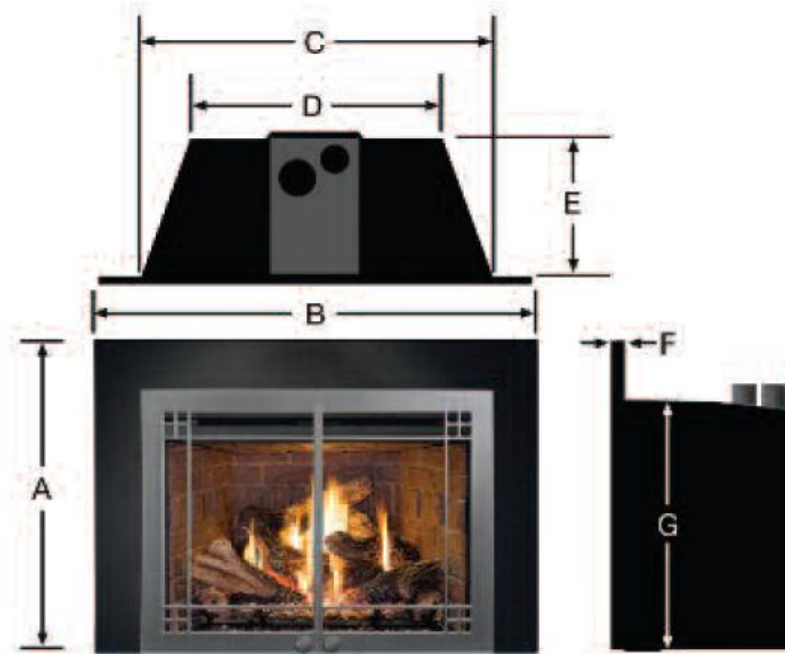

FV33i			
A	24"	27"	31"
B	36"	40"	44"
C	30-5/16"		
D	22-1/4"		
E	15-5/8"		
F	1-3/4"		
G	18-1/4"		

FV44i			
A	31"	33"	36"
B	44"	48"	52"
C	34"		
D	24"		
E	16-3/8"		
F	1-3/4"		
G	23-3/4"		